



Model			Outdoor unit	1U20FH2QAA	1U25FH2QAA	1U30HH3QAA	1U34HH2QAA	1U38LH2QAB	1U45LH2QAB	1U55LH2QAB
			Indoor unit	AB20FH2QAA	AB25FH2QAA	AB30FH2QAA	AB34FH2QAA	AB38FH2QAA	AB45FH2QAA	AB55FH2QAA
Nominal performance data	Nominal cooling capacity	Btu/h(nom.)	18630	24550	29600	33100	37300	47200	51500	
		KW	5.46	7.20	8.68	9.70	10.93	13.83	15.09	
	Rated power input	KW (nom.)	1.86	2.45	2.85	3.15	3.59	4.50	5.80	
	EER	KW/KW	2.94	2.94	3.04	3.08	3.05	3.07	2.60	
Indoor Unit			AB20FH2QAA	AB25FH2QAA	AB30FH2QAA	AB34FH2QAA	AB38FH2QAA	AB45FH2QAA	AB55FH2QAA	
Electrical parameters	Power supply	Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	
Performance	Air flow(H/M/L)	m³/h	1249/1133/971/833	1249/1153/999/826	1635/1360/1150/850	1815/1530/1300/1000	1815/1530/1300/1000	1901/1600/1350/1050	1901/1600/1350/1050	
	Sound pressure level(H/M/L)	dB(A)	40/39/36/34	44/42/40/36	47/46/42/37	48/46/43/40	48/46/43/40	49/48/43/40	51/48/45/42	
Installation	External dimensions (W/D/H)	mm	840x840x204	840x840x204	840x840x246	840x840x246	840x840x246	840x840x288	840x840x288	
	Shipping dimensions (W/D/H)	mm	980x980x290	980x980x290	985x985x350	985x985x350	985x985x350	985x985x380	985x985x380	
	Net/Shipping weight	kg	25/30	28.5/33,5	34/40	34/40	34/40	36/42	36/42	
	Remote Controller Controller Model	Standard	YR-HBS01	YR-HBS01	YR-HBS01	YR-HBS01	YR-HBS01	YR-HBS01	YR-HBS01	
			PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB	
Panel	External dimensions(W/D/H)	mm	950x950x50	950x950x50	950x950x50	950x950x50	950x950x50	950x950x50	950x950x50	
	Shipping dimensions(W/D/H)	mm	1000x1000x110	1000x1000x110	1000x1000x110	1000x1000x110	1000x1000x110	1000x1000x110	1000x1000x110	
	Net/Shipping weight	kg	6,5/9	6,5/9	6,5/9	6,5/9	6,5/9	6,5/9	6,5/9	
Outdoor Unit			1U20FH2QAA	1U25FH2QAA	1U30HH3QAA	1U34HH2QAA	1U38LH2QAB	1U45LH2QAB	1U55LH2QAB	
Electrical Parameters	Power supply	Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	3/380-415/50	3/380-415/50	3/380-415/50	
Performance	Air flow (H)	m³/h	2500	2500	3500	3500	5500	5500	5500	
	Sound pressure level	dB(A)	52	52	56	56	61	61	59	
Installation	External dimensions(W/D/H)	mm	810x340x680	810x340x680	862x375x730	840x415x960	1008x410x830	1008x410x830	948x340x1250	
	Shipping dimensions(W/D/H)	mm	940x410x760	940x410x760	1005x440x800	1070x410x940	1130x500x950	1130x500x950	1085x405x1350	
	Net/Shipping weight	kg	49/53	53/57	59/65	73/80,5	84/93	94/102,5	107/117	
	Compressor type		Rotary	Rotary	Rotary	Rotary	Rotary	Scroll	Scroll	
	Refrigerant type		R410a	R410a	R410a	R410a	R410a	R410a	R410a	
	Refrigerant liquid pipe	mm	6,35	9,52	9,52	9,52	9,52	9,52	9,52	
	Refrigerant gas pipe	mm	15,88	15,88	15,88	15,88	19,05	19,05	19,05	
	Max pipe length	m	20	20	30	30	50	50	50	
	Max drop between I.U.&O.U	m	5	5	10	10	20	20	20	
Working temp.	Normal (Min-Max)		10-43	10-43	10-43	10-43	10-43	10-43	10-43	

*Data is pending



Distributed by:
PT. Haier Sales Indonesia
Jl. Danau Sunter Barat Blok A III
No. 38-39, Jakarta Utara 14350

 aqua japan
 aqua japan
 aqua japan
 www.aquajapanid.com

 aqua japan
 aqua japan

Call Center (Bebas Pulsa)
0800 1 003 003
Jaim Operasional
Senin - Jumat (08.30 - 18.00 WIB)
Sabtu (09.00 - 15.00 WIB)

SINGLE LIGHT COMMERCIAL
**Cassette
Type**

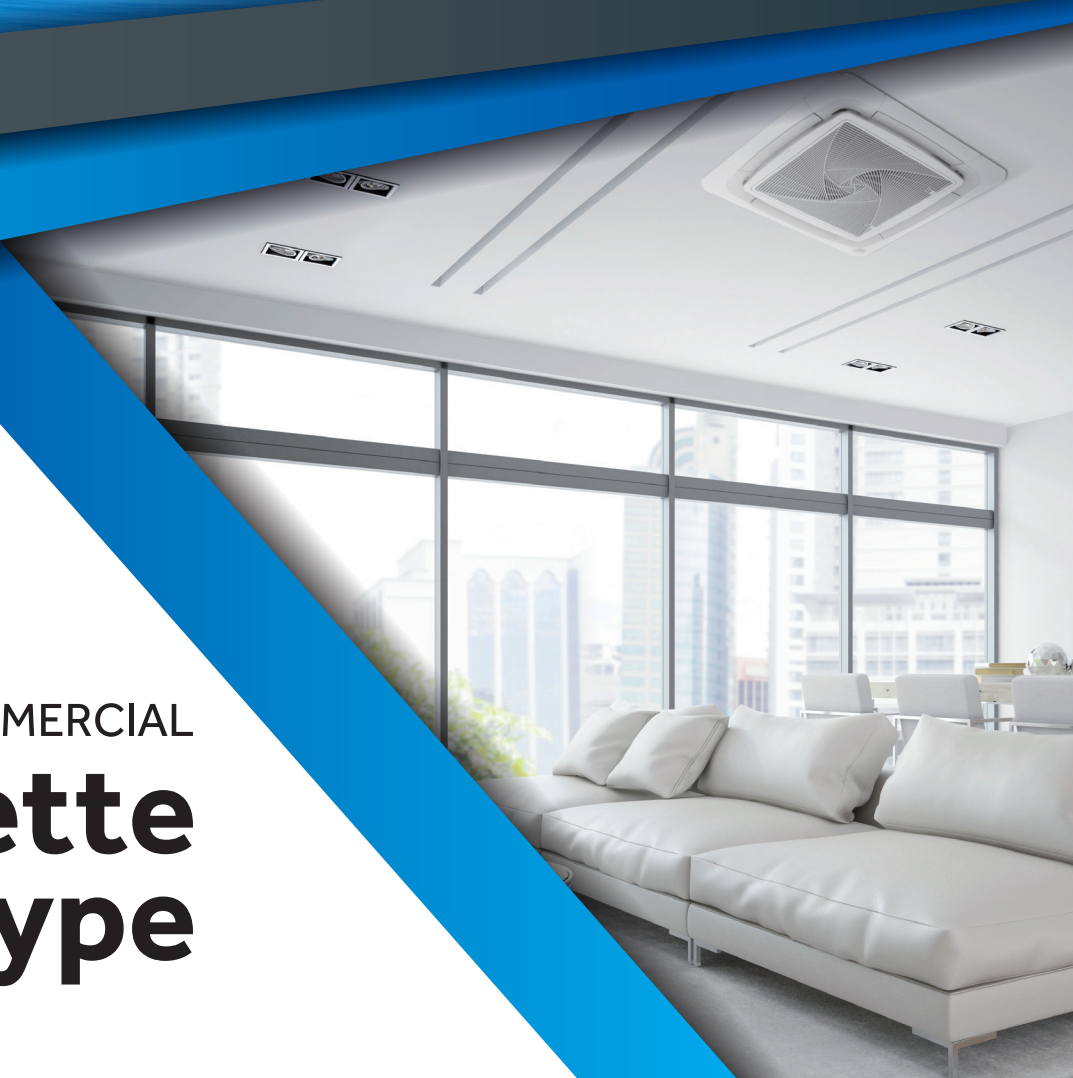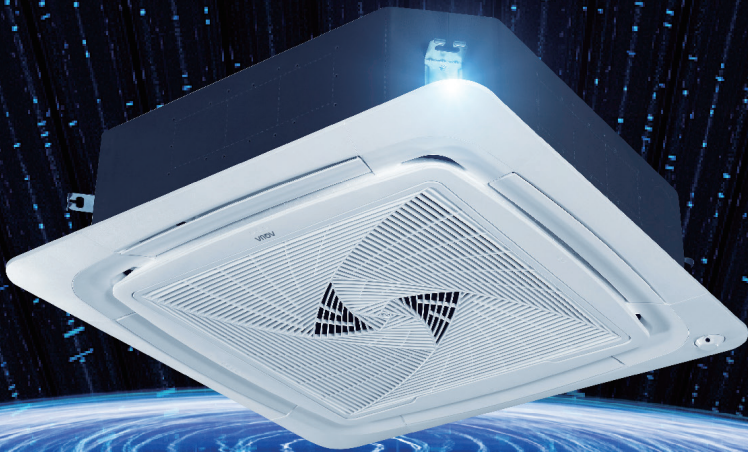

■ INDIVIDUAL FLAP CONTROL

The four flaps can be controlled individually according to end users by controller, providing maximum comfort throughout the room, it is a good solution to avoid "air conditioning disease".




corner installation solution



comfort solution

■ ROUND WAY AIR SUPPLY

Round way air supply without blind spot.

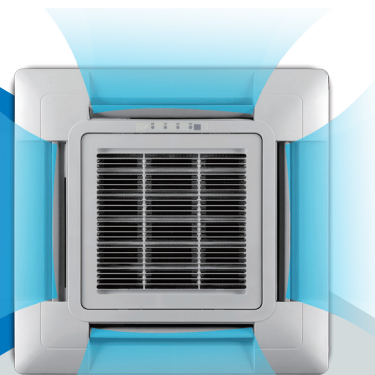

4 way airflow



Unique round way air flow design

■ DISMANTLING ONLY 1 SCREW

Installer can finish wiring by taking down 1 screw.



■ HIDDEN LCD DISPLAY

The 360°smart flow cassette have particular hidden LCD display design. Green display for cooling red display for heating, it is very easy identified by opening mode.



■ ABS MATERIAL PANEL

ABS material makes the panel "piano white", different from "dark white" PS material color. The panel and flap are the same material. After 10 years, the panel color won't change to yellow color because the ABS material prevents discoloration against light raying.



■ "SPIRAL" PANEL

"Spiral" concept, "Haier" image.



■ CONVENIENT CLIP

There is clip to lock the panel. Just one installer can finish the screwing for panel. Save manpower and easy installation.

